


UPAMAT[®]-H/DS

**Special baling presses for
document shredding**

CHANNEL BALING PRESSES OF THE SERIES UPAMAT®-H/DS

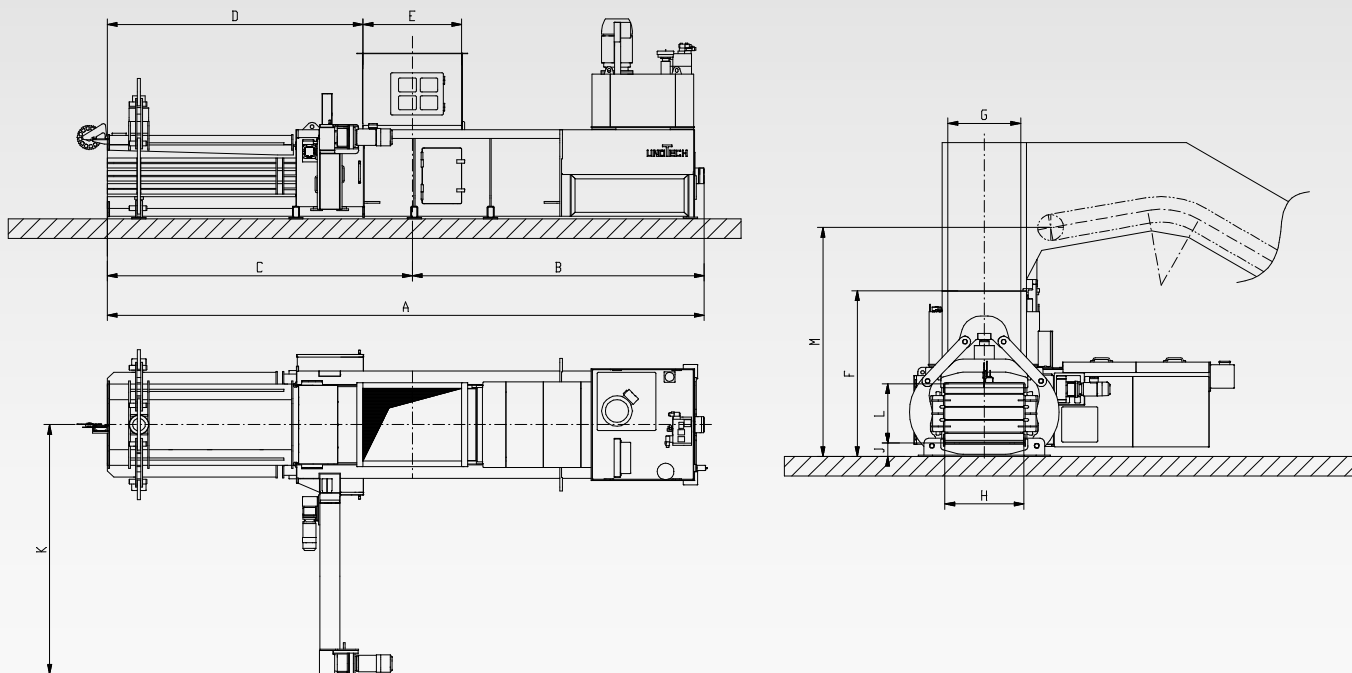

DIMENSIONS	A	B	C	D	E	F	G	H	J	K	L
UPAMAT-H/DS	7.650	3.785	3.865	3.240	1.250	2.000	920	1.000	170	3.160	750

TECHNICAL DATA

UPAMAT-H/DS	50 H4/DS	70 H4/DS
Pressing force	500 kN	600 kN
Cutting force max.	600 kN	720 kN
Specific pressure	84 N/cm ²	98 N/cm ²
Hopper opening	1.250 x 920 mm	1.250 x 920 mm
Tunnel section (h x w)	750 x 1.000 mm	750 x 1.000 mm
Throughput*	1 x 15 kW - 1 x 22 kW - 1 x 30 kW	1 x 22 kW - 1 x 30 kW - 1 x 45 kW
20-30 kg/m ³	1,5 t/h 4,2 t/h 5,2 t/h	4,2 t/h 5,2 t/h 9,3 t/h
35-50 kg/m ³	2,5 t/h 7,0 t/h 8,5 t/h	7,2 t/h 8,7 t/h 15,5 t/h
60 kg/m ³	3,0 t/h 8,4 t/h 10,5 t/h	8,5 t/h 10,5 t/h 18,5 t/h
80 kg/m ³	3,4 t/h 8,5 t/h 11,0 t/h	9,2 t/h 11,2 t/h 19,5 t/h
Bale weight**	350 - 500 kg	400 - 600 kg
Bale length	up to 1,8 m	up to 1,8 m
Total weight	approx. 8 t	approx. 13,6 t

* depending on input density and main drive

**depending on input density and bale length

subject to changes in design and dimensions!

Table shows a selection of possible drive powers. Other drive configurations possible.



unoTech GmbH • Feldkoppel 17 • 49779 Niederlangen • Germany
 Phone: +49 5939/94 144-11 • Fax: +49 5939/94 144-30
 info@unotech.de • www.unotech.de

